

REVISION RECORD					
REV	ECD	DESCRIPTION	DRFT	DATE	
△		增加VDE、CE、UL刻字	HD	10/20/08	

H

G

F


E

D

C

B


A

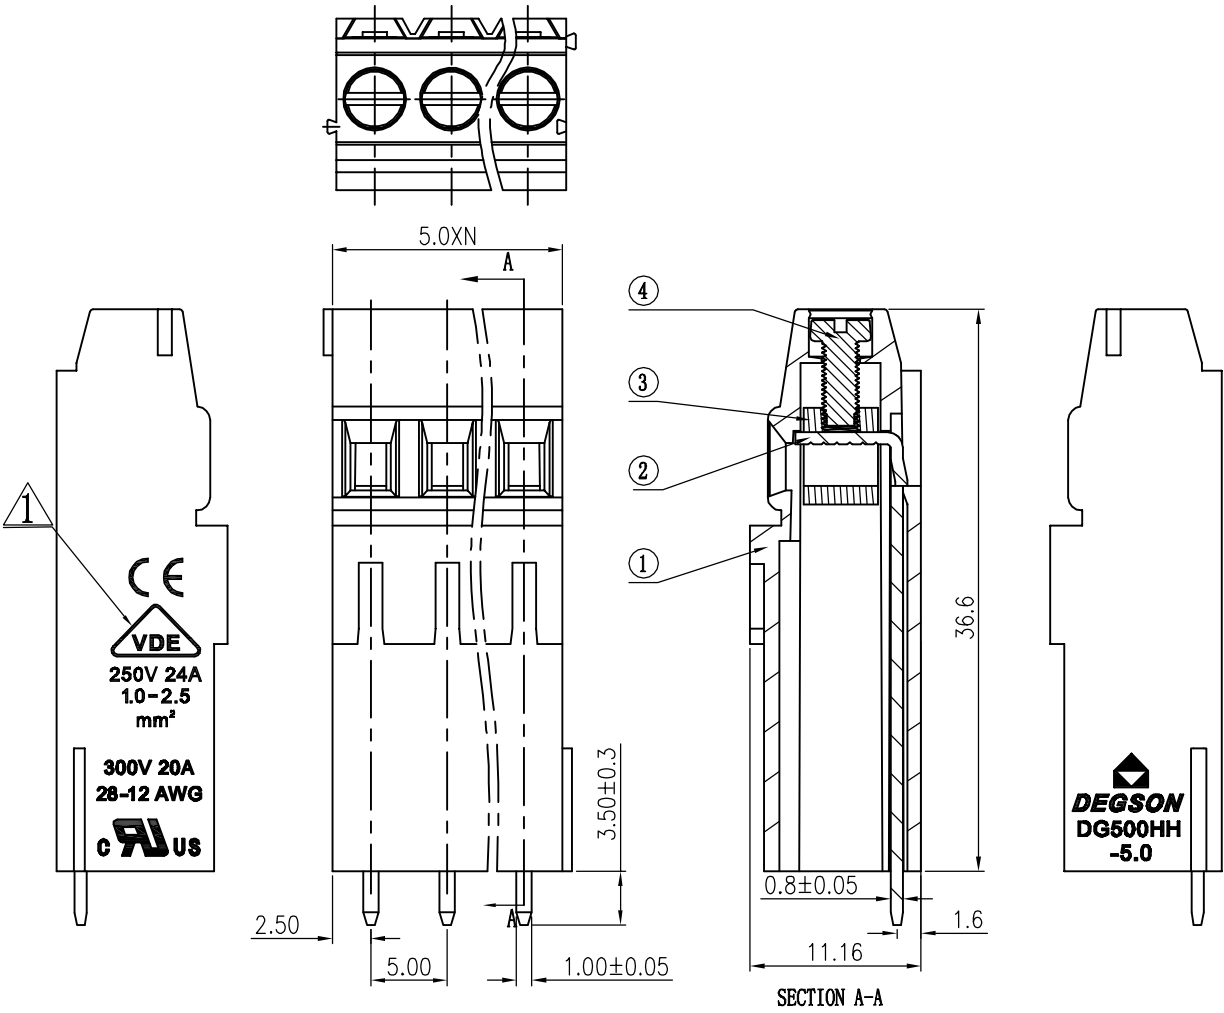

- Notes:
1. Pitch: 5.00mm , Poles:2-XXP
 2. Rated voltage/current:UL 300V/20A
VDE 250V/24A
 3. Insulation resistance: 5000MΩ/DC1000V
 4. Wrtthstanding voltage: AC2000V/1min
 5. Wire range: 28-12AWG , 2.5mm²
 6. Temp. Range: -40° C~+105° C
 7. Torque: 4.08kgf.cm
 8. Undimensioned Tolerances:

Pitch range in mm			Nominal dimension range in mm						—
to	over	over	to	over	over	over	over	over	—
6	6	10	30	30	60	100	150	150	∩
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10	□

4	DG128"一"Screws	S000001460 (H)	XX	Steel	Zinc plated
3	DG128 Wire guard	X000000020 (H)	XX	Brass	Ni plated
2	DG500HH-Pin header	4060B00010 (H)	XX	Barss	SnCe

1	DG500HH-5.0 Housing (H)	4059A0YXXA (H)	PA66	UL94V-0				
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES			
DETAILED LISTS	MM (INCH)	DFTO ZYH	DATE 10/25/08*	 宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD NAME DG500HH-5.0-XXP-1Y-00A(H)				
	TOLERANCES EXCEPT AS NOTED	CHKD	DATE					
	MM	MFD	DATE					
	.0 ±	APPVL	DATE					
	.00 ±							
	.000 ±							
	ANGLES ± 1°	G.E :		DRAWING NO. DG500HH-5.0-E01			SIZE A4	REV T1
		FINISH:		/PART NO.			10/20/09*	
	THIRD ANGLE PROJECTION	SCALE : 1:1		DO NOT SCALE DRAWING			SHEET 1	OF 1